



Think
Unique
Think **EURO** Wooden Flooring

Natural Range

Complete Wooden Flooring Solutions

EURO,

A WIDE RANGE OF VIVID NATURAL WOODEN FLOORINGS

THINK DIVERSE, THINK EURO WOODEN FLOORING

It's in the lap of luxury that you live and it's only natural to want the same, beneath you feet. Euro's latest offering of laminate and real wood floorings bring warmth, character and sophistication to your spaces.

Aesthetically designed, they are hallmark of exquisite craftsmanship and sheer elegance. Euro flooring are durable and timeless, they breathe life into your homes, so don't be surprised if you have a therapeutic experience while walking around your room.

If you are looking for complete flooring solutions to meet your special needs, look no further.

MISSION

To provide high quality and complete flooring solutions through an amalgamation of technical excellence, superior service, innovation and a moral commitment to our clients and associates

VISION


To achieve 100% customer satisfaction, to set high trade standards and be an exemplar, both for the industry and for our own establishment

WHERE YOUR 'LIFE' & 'STYLE' MATTER

At EURO, we firmly believe that nothing is more important than the health & well-being of those individuals who place their trust in our company.

Thus you will never find us compromising on the quality of our floors to make a quick sale. Our range of Laminate & real wood flooring have undergone stringent testing to ascertain your safety and maintain the splendor of your space. Rest assured our floors also have hypo-allergenic properties; this could be your concern for children and senior members of your family.

EURO floors also add a touch of class to your space with its varied decor options, to blend in with your taste and compliment your space, at EURO, we painstakingly innovate to provide you the latest of premium floors which depict your style quotient.

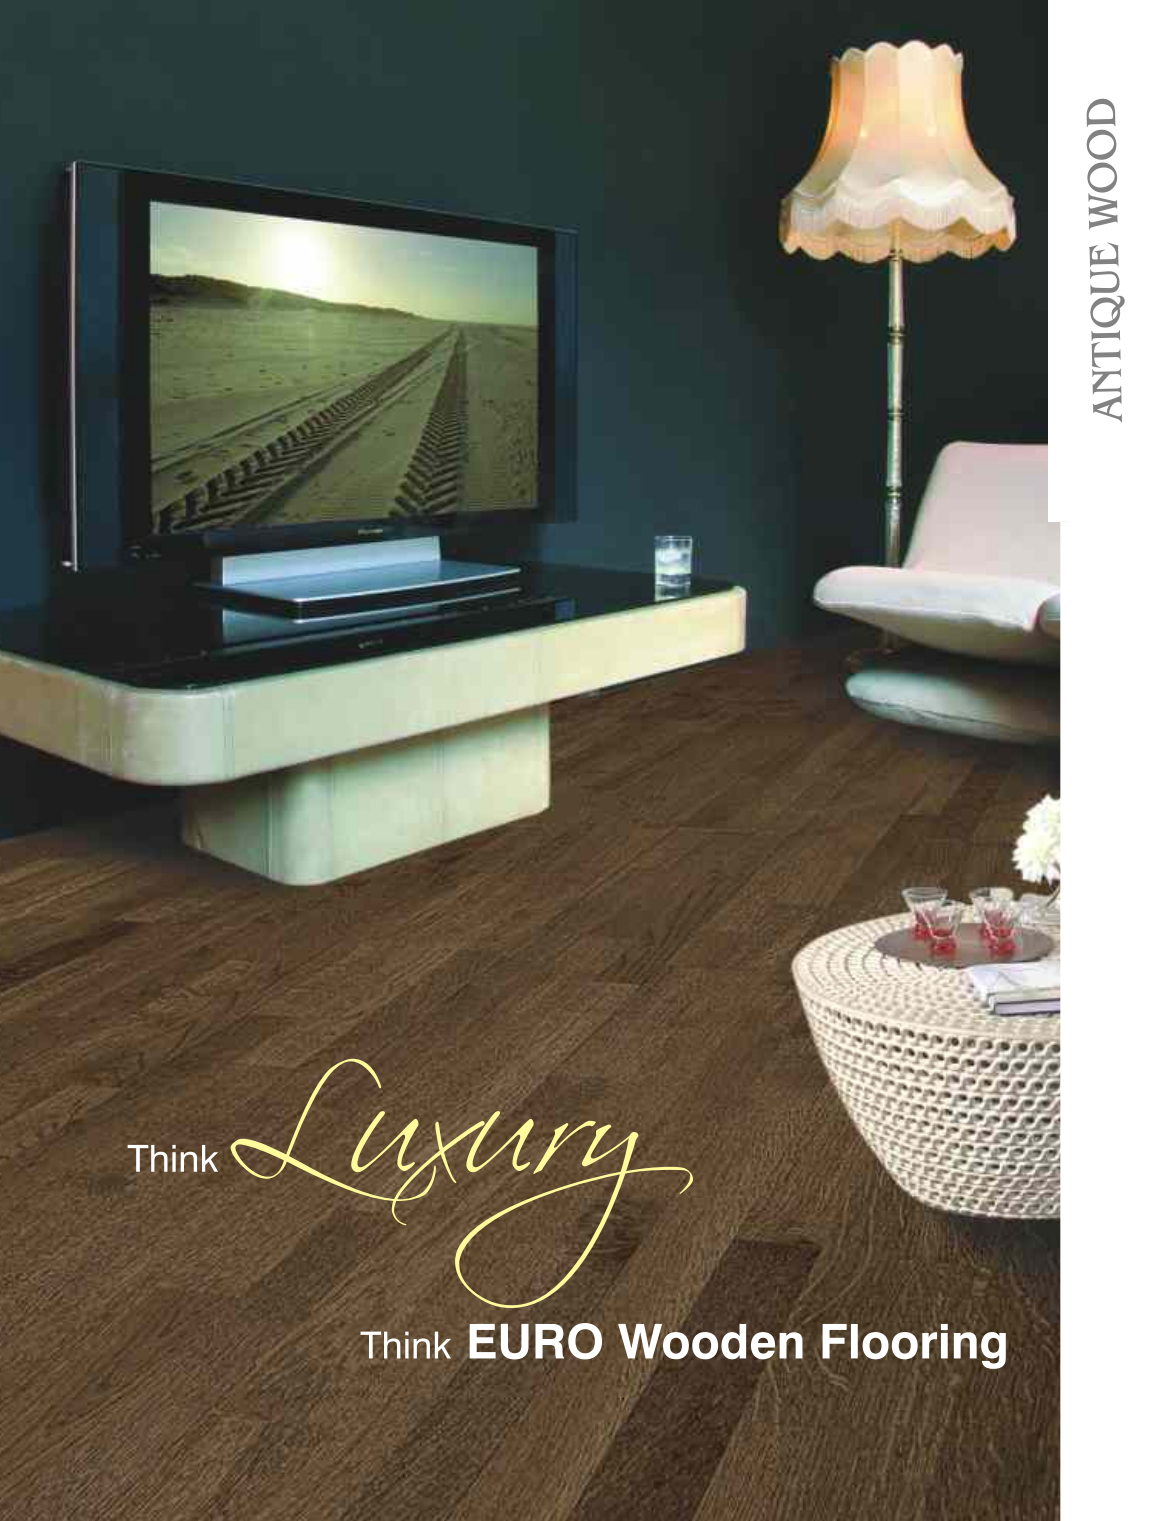

ANTIQUE WOOD

Think *Luxury*

Think **EURO Wooden Flooring**

ANTIQUE WOOD

Antique Wood - Mark of Luxury

Going with the age old ethics, ANTIQUE WOOD is the product blended with style & elegance, which enhance the beauty of surrounding where it is used with its high quality. A very imprecate element and there by can aesthetically improve the premises to a great extent.




- Made from Naturally Seasoned Solid Wood.
- Solid wood with excellent dimensional stability.
- Unique brushed surface flame resistance and not affected by burning cigarette stubs etc.
- Tough durable and easy to clean.
- Natural wood likely is to have colour variation.



AT101 **Cognac**

DIMENSIONS: 15MMX1190MMX172MM






AT102

Tuscany Brown

DIMENSIONS: 15MMX1190MMX172MM






AT103

Coffee

DIMENSIONS: 15MMX1190MMX172MM






AT104

Tiger Eye

DIMENSIONS: 15MMX1190MMX172MM






AT105

Wenge Black

DIMENSIONS: 15MMX1190MMX172MM






AT106

Caramel


DIMENSIONS: 15MMX1190MMX172MM




Technical Specifications for Antique Wood

| Parameter tested | Standard | Requirement | Description | Test Result |
|---|----------------|-------------|---|-------------|
| Wear resistance of | EN-14354:2004 | > 1000 tr | Abrade the surface of the sample | Passed |
| | | | with 2 abrasive wheels (180#). | |
| | | | needed to take off the coating | |
| Adhesion resistance of the top layer (Cross cut) | EN-14354:2004 | < Class 2 | Cross cut the surface and check whether part of coating took off | Passed |
| | | | | |
| Scratch resistance of the top layer (coin test) | Hamberger | > 20 N | Scratch the surface with a round steel device. Increase the pressure the coating start top be damaged | Passed |
| | | | | |
| Scratch resistance of the top layer (pencil test) | GB/T 6739-1996 | > 2H | Scratch the surface with a pencil. Increase the hardness of the pencil until the coating start top be damaged | Passed |
| | | | | |
| Impact resistance of the top layer (Large ball) | EN-14354:2004 | > 800 mm | Drop a 324g steel ball on the planks. Record the maximum height which does not produce cracks | Passed |
| | | | | |
| Bending modulus elasticity | EN-310:1993 | > 4000 Mpa | Load a sample in the middle and record the maximum destruction load then calculate the bending modulus elasticity | Passed |
| | | | | |
| | | | record the maximum destruction load then calculate the bending strength | |
| | | | | |

Construction of Antique Wood Flooring

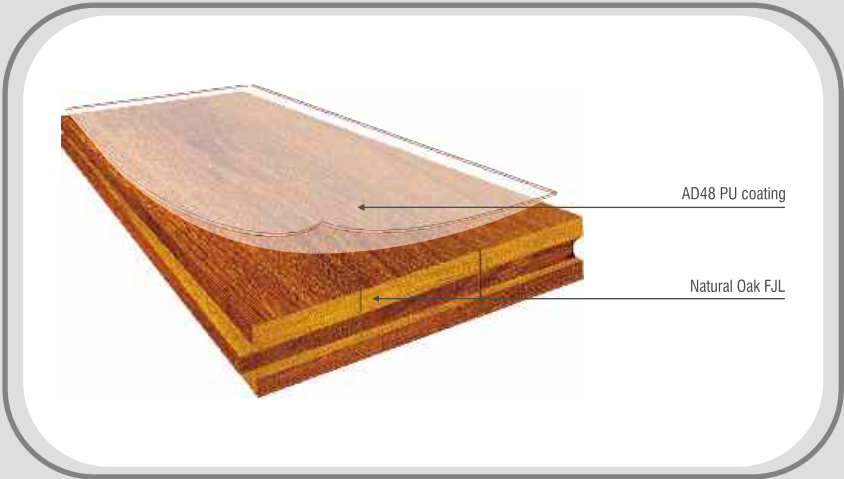

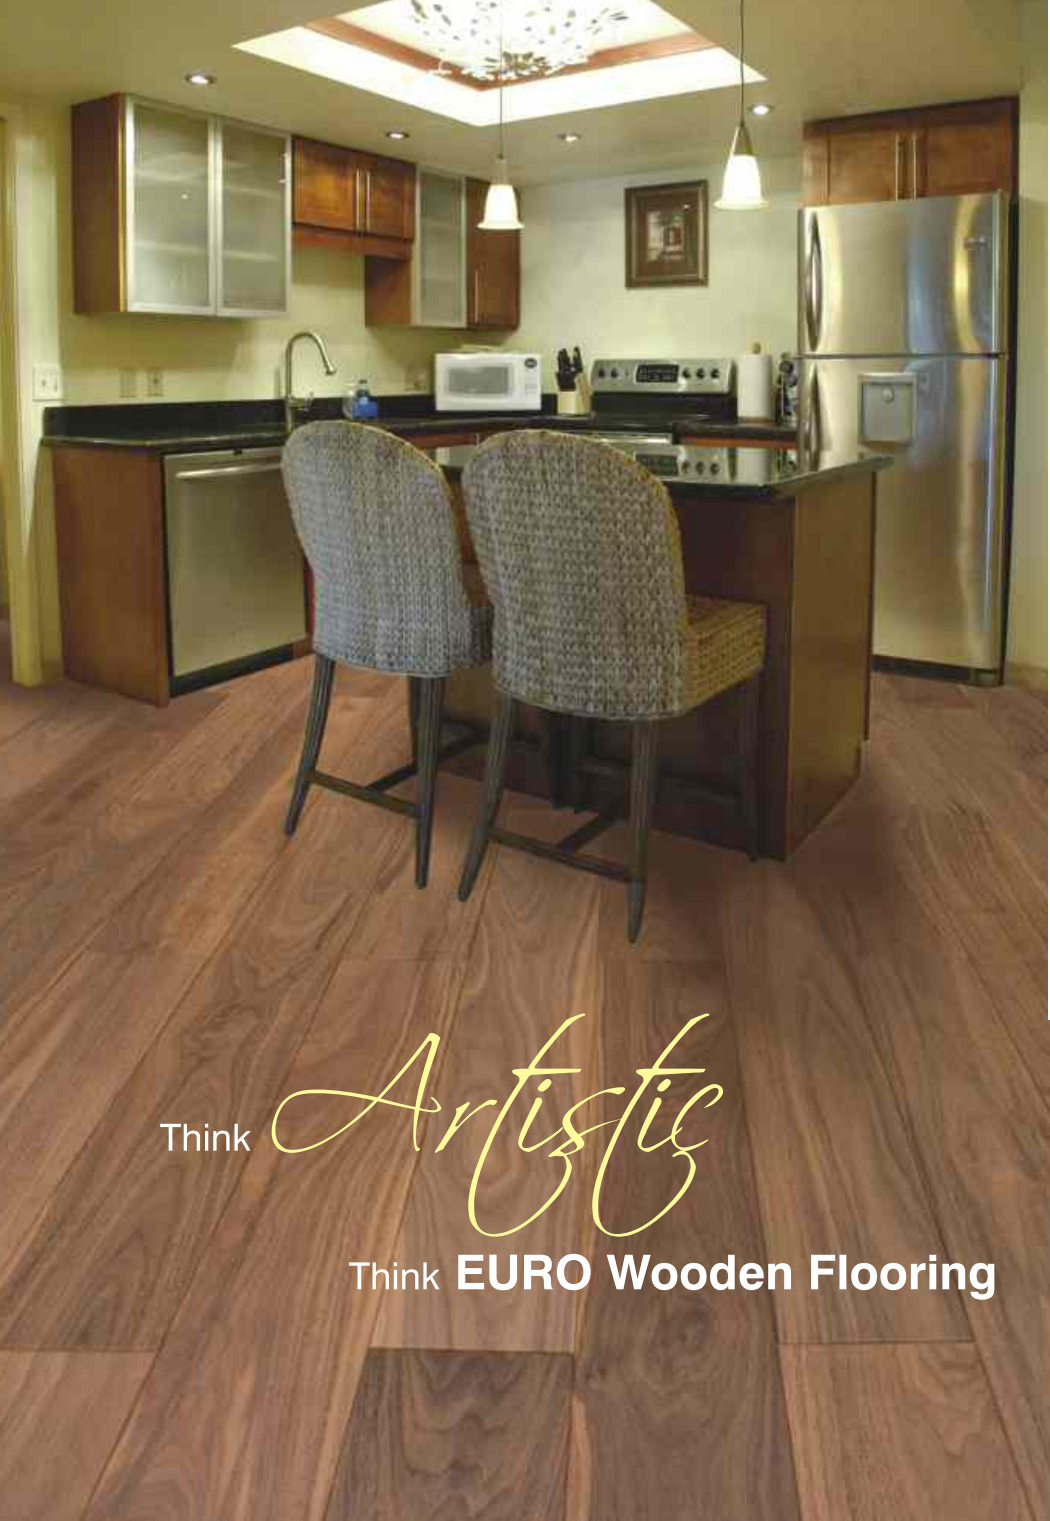

Think *Artistic*

Think **EURO Wooden Flooring**

DECO ENGINEERED

DECO ENGINEERED

Euro Deco Engineered - *The Exotic Experience*

The name describes the product. The Deco Engineered Flooring gives you an option of exotic wood specie to match your furniture, wood or veneer to give the elegant look. Deco Engineered floors are very warm and inviting & designed to give you the beauty of natural solid wood floor with the strength & uniqueness of engineered floor.

- Top Natural wood layer from Naturally Seasoned Decorative Solid wood.
- Multi layered structure makes it dimensionally stronger.
- Versatile. Can be used for both traditional and modern settings.
- UV Acrylic with anti scratch top coat which protects the surface.
- Can be resanded.
- These Natural products are likely to have colour variations.





EN7101

White Oak

DIMENSIONS: 12MM X 910MM X 125MM





EN7102

Levi Oak

DIMENSIONS: 12MM X 910MM X 125MM





EN7103

African Sapele

DIMENSIONS: 12MM X 910MM X 125MM






EN7104

Canadian Maple

DIMENSIONS: 12MM X 910MM X 125MM






EN7105

American Cherry

DIMENSIONS: 12MM X 910MM X 125MM





EN7106

American Walnut

DIMENSIONS: 12MM X 910MM X 125MM






EN7107

Burma Teak

DIMENSIONS: 12MM X 910MM X 125MM







Deco Engineered: En7106 American Walnut

Technical Specifications for Deco Engineered

| Specification For Euro Engineered Flooring | |
|--|--|
| Product: Multi Layer Ply Engineered Wood Flooring Specification: Single strip | |
| Thickness | 12.0mm +/- 0.3mm |
| Thickness of top layer | 2.00mm +/- 0.5mm |
| Surface layer length (panel) | 910 mm +0/-20mm |
| Surface layer width (panel) | 125mm +/- 0.1mm |
| Finishing | Treated with 7 coats of UV Acrylic – 80gm/m ² |
| Gloss level of surface layer | 25 +/- 3% |
| Abrasion of surface coating | 150 – 200 cycles DIN 68861 T12 |
| Inflammability | B1 classifications as per DIN 4102 |
| Chemical resistance | DIN 68861 TL 1 |
| Opening between panels (when laid) | According to DIN 280 Part 5 |
| Surface layer composition | 2 Strip Random pattern |
| Height difference between panels | 0.2 mm (max) |
| Moisture content | 7 +/- 1% |
| Glue | Urea Formaldehyde E1 certified |

Construction of Deco Engineered Flooring

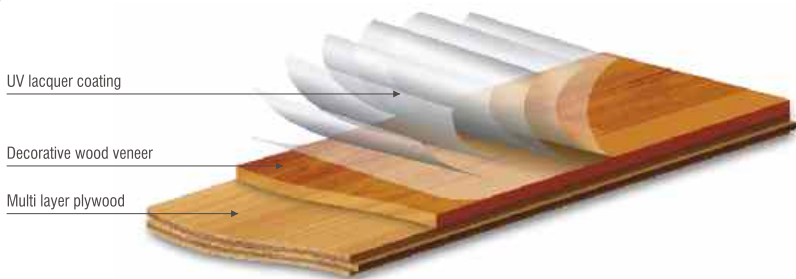

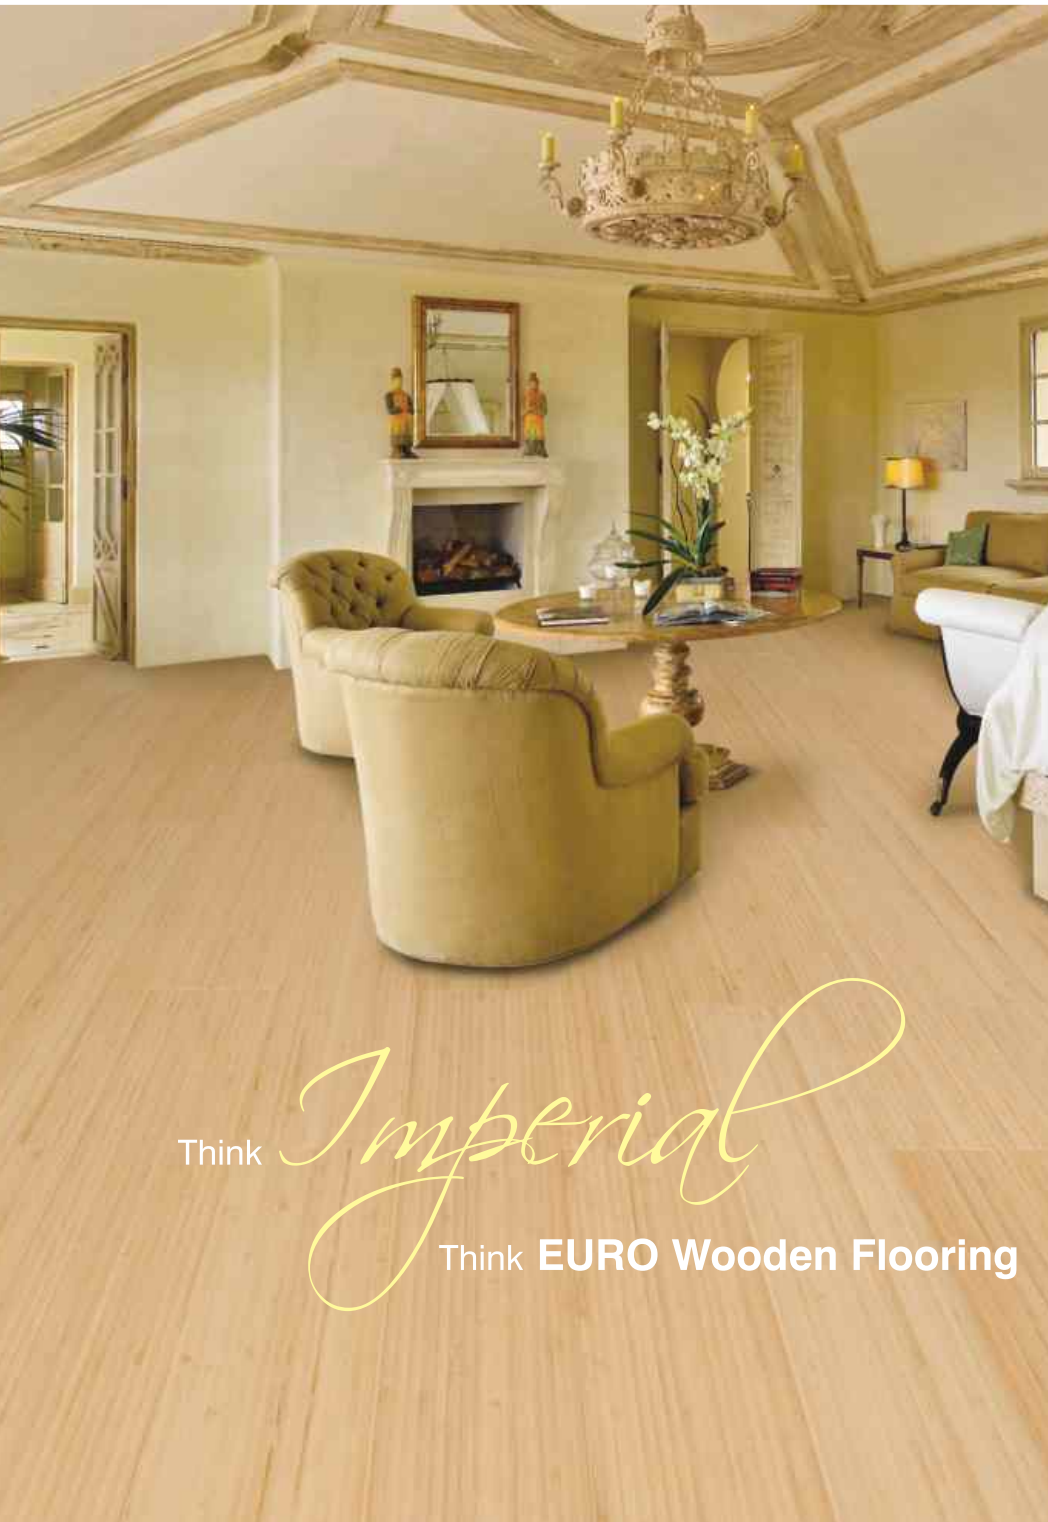

Think

Imperial

Think **EURO Wooden Flooring**

BAMBOO

BAMBOO

Euro Bamboo Flooring - *The Zen Experience*

Enter a room and feel the serenity, such is the effect of Bamboo. An appreciation for the natural world is at the heart of Euro's bamboo flooring.

Our bamboo flooring provide tremendous interior design flexibility and a tranquil ambience. They are made with all natural, high-quality bamboo that are water, insect and fire resistant, and look ever so beautiful. In addition, our bamboo floors will bring good Fengshui along with that rejuvenating experience that you yearn for. Experience a whole new world full of peace and harmony right in your space.

- Made from Kiln dried oldest Bamboo wood.
- It has a bright, clean and beautiful appearance.
- It is water resistant, insect resistant and fire resistant.
- Offers tremendous interior design flexibility.
- Brings good Fengshui.
- Provides a unique grain and distinctive colouring.
- It has Aluminium Oxide finish.
- These Natural products are likely to have colour variations.





EU9001

Natural Horizontal

DIMENSIONS: 15 MM X 960 MM X 96 MM






EU9002

Natural Vertical

DIMENSIONS: 15 MM X 960 MM X 96 MM





EU9003

Carbonized Horizontal

DIMENSIONS: 15 MM X 960 MM X 96 MM





EU9004

Carbonized Vertical


DIMENSIONS: 15 MM X 960 MM X 96 MM



Technical Specifications for Bamboo

| Items No. | Tested Item | | Unit | Technical Requirement | Test Results | Judgment |
|-----------|---------------------------------|----------------|----------------------------------|---|-----------------------------|----------|
| 1 | Moisture Content | | % | 6.0 ~ 14.0 | 7.4 | Passed |
| 2 | Dimensions and Tolerances | Length | mm | $\Delta L_{ave} \leq 0.5$ | 0.2 | Passed |
| | | Width | mm | $\Delta W_{ave} \leq 0.15$ | 0.06 | |
| | | | | $W_{max} - W_{min} < 0.3$ | 0.12 | |
| | | Thickness | mm | $\Delta T_{ave} \leq 0.5$ | 0.18 | |
| | | | $\Delta t_{max} - t_{min} < 0.5$ | 0.06 | | |
| 3 | Bending Strength | | Mpa | ≥ 90.0 | 98.0 | Passed |
| 4 | Water Soaked Delamination Test | | mm | The Length of Delamination on any glue line should be no more than 25mm | <25 | Passed |
| 5 | Hardness | | Mpa | ≥ 55.0 | 59.0 | Passed |
| 6 | Abrasion Resistance | Revolution | | Coating should be remained after 100 revolutions | Coating remained | Passed |
| | | Abrasion Value | G/100r | ≤ 0.08 | 0.05 | |
| 7 | Stain Resistance | | | No Staining | No Staining | Passed |
| 8 | Adhesion of surface Coating | | | A little intermittent flake permitted | A little Intermittent flake | Passed |
| 9 | Formaldehyde Emission | | Mg/L | $E1 \leq 1.5$ | 0.23 | Passed |
| 10 | Resistance to Surface Impact | | mm | ≥ 1000 , Diameter of impress ≤ 10 , No Crack | 7.0 No Crack | Passed |

Construction of Bamboo Flooring

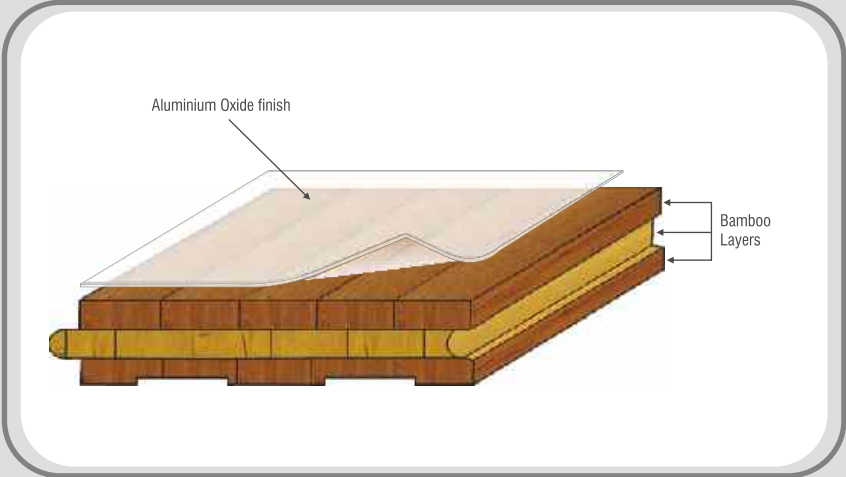

EXPLANATION OF IMPORTANT SYMBOLS

Structural Warranty



Residential Warranty



Commercial Warranty



Moisture Resistant HDF



Extra Moisture Resistant HDF



V-Groove




Finish




Plank Design




2 Strip Design



3 Strip Design



Multi Strip





Euro Flooring Pvt. Ltd.

☎ Customer Care : +91 98805 89241 E-mail : sales@euroflooring.co.in

www.euroflooring.co.in

Note : The printed samples shown in this catalogue are only indicative of the colour patterns & finishes available, it may differ from the actual sample.